


### 特徴

- \* 材質は耐熱プラスチックでできており腐食を防ぎます。
- \* 切断することにより、長さを自在に調整できます。
- \* 組込みが容易
- \* 最高使用温度：135
- \* 一条ネジ、二条ネジ用の二種類。(使用例：下記図参照ください。)




### 使用例

Z968/ 一条ネジ

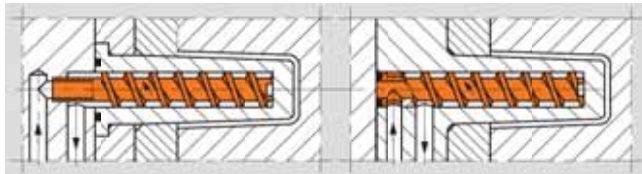

Z969/ 二条ネジ

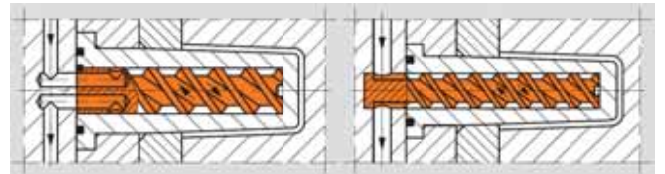

上記スパイラルコアの他に、Z96/...(一条ネジ)及び Z961...(二条ネジ)もございます。


材質:DIN3.2315 最高使用温度 200

### Z968/... 一条ネジ

材質:PA,GFK

b	l	p	d	D	L	Nr. / No.		
3	35	14	8	12	125	Z968/12x125		
					160	12 x 160		
					200	12 x 200		
					11	16	125	16 x 125
							160	16 x 160
							200	16 x 200
	13	20	125	20 x 125				
			160	20 x 160				
			200	20 x 200				
	15	25	125	25 x 125				
			160	25 x 160				

b	l	p	d	D	L	Nr. / No.		
3	35	14	15	25	200	Z968/25x200		
					125	32 x 125		
					160	32 x 160		
					26	40	125	40 x 125
							160	40 x 160
							200	40 x 200
	32	50	125	50 x 125				
			160	50 x 160				
			200	50 x 200				

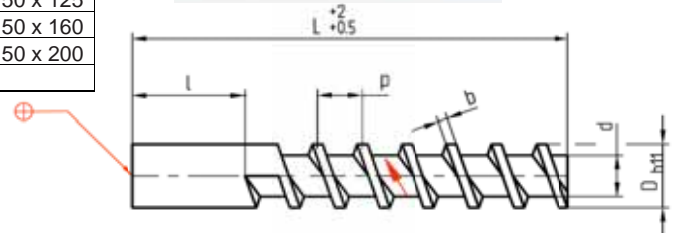

### Z969/... 二条ネジ

材質:PA,GFK

b	l	p	d	D	L	Nr. / No.		
3	35	28	8	12	125	Z969/12x125		
					160	12 x 160		
					200	12 x 200		
					11	16	125	16 x 125
							160	16 x 160
							200	16 x 200
	13	20	125	20 x 125				
			160	20 x 160				
			200	20 x 200				
	15	25	125	25 x 125				
			160	25 x 160				

b	l	p	d	D	L	Nr. / No.		
3	35	28	15	25	200	Z969/25x200		
					125	32 x 125		
					160	32 x 160		
					26	40	125	40 x 125
							160	40 x 160
							200	40 x 200
	32	50	125	50 x 125				
			160	50 x 160				
			200	50 x 200				

